


# ComEth4070e

## 6U VME 1/10/40 Gigabit Ethernet Switch

- 6U VME
- Managed Layer 2+/3
- Up to 32 ports
- SFP+ (front)
- 10/100/1000Base-T (rear)
- VME 64x compliant

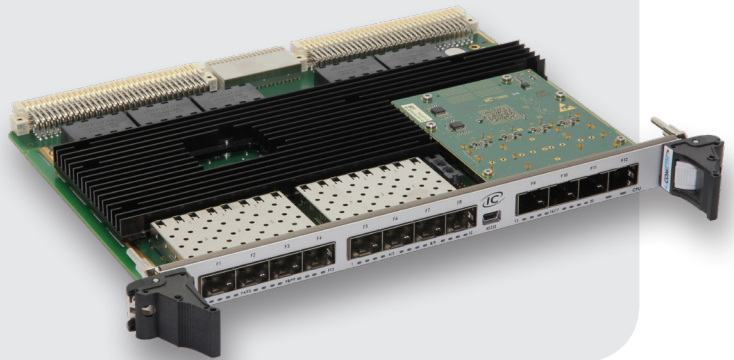

## Description

The **ComEth4070e** is a cutting-edge 6U VME Layer 2/3 Ethernet switch compatible with VME 64x systems.

## Overview

Powered by the newest Marvell highly integrated system-on-chip (SoC) with programmable packet processors, the ComEth40x0e line not only offers complete backward compatibility with the previous generation of products, but also provides a high 10/40 Giga Ethernet port count, making these products unique compared to other VME Ethernet switch products.

The ComEth40x0e matrix coupled with an independent management processor is controlled by Switchware, the field-proven Interface Concept network management application.

Switchware supports a wide range of Ethernet protocols and has an easy to use graphical user interface (GUI).

In addition to a non-Flash device, a removable Flash disk allows storing switch configuration files and logs, offering flexibility to the user, and allowing sanitization when needed.

## Ethernet interfaces

The **ComEth4070e** offers up to 32 Ethernet ports in two different options:

- 24 rear Giga Ethernet ports and 8 front SFP+ (1/10Gbs),
- 20 rear Giga Ethernet ports, 8 front SFP+ (1/10Gbs) and a front interface mezzanine

The available mezzanines are:


- 4 front SFP+ (1/10Gbs)
- 2 front 1/2.5/5/10GigaE-baseT
- 1 front QSFP+(40Gbs)

The **ComEth4070e** is available in standard, extended, rugged air-cooled and conduction-cooled grades

# ComEth 4070e

6U VME 1/10/40 Gigabit Ethernet switch

## Block Diagram

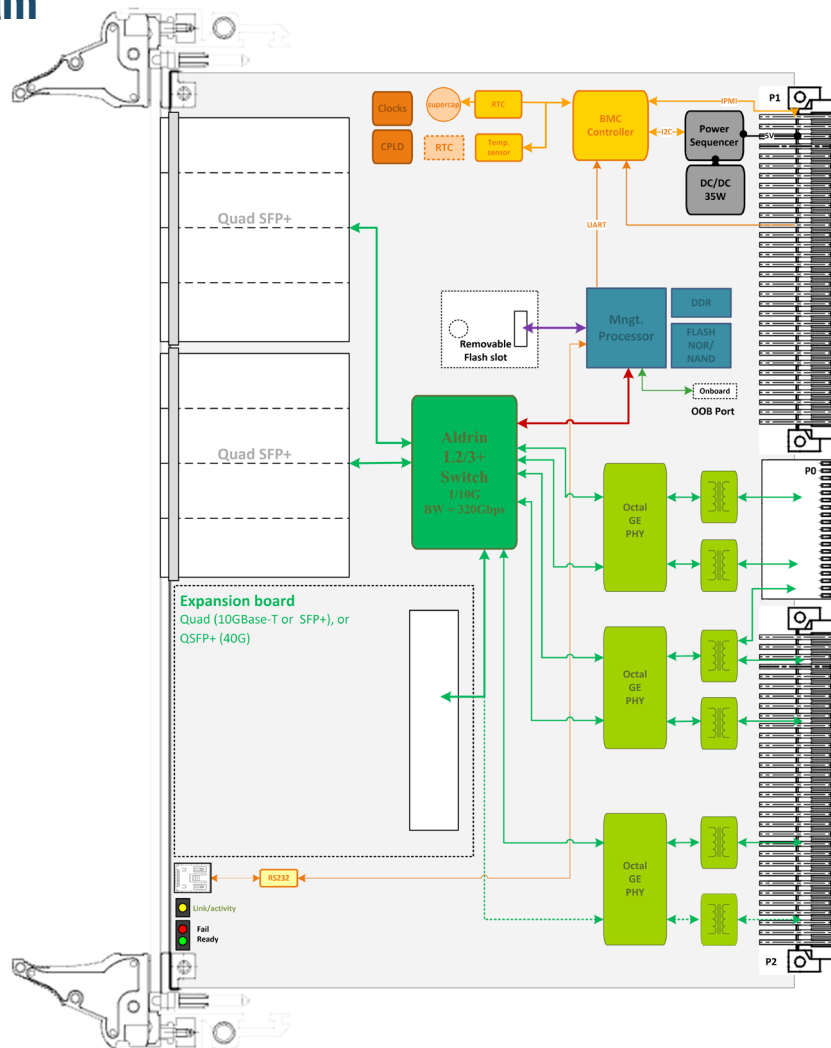

## Main features

### Layer 1/2

- Speed, duplex, auto-negotiation, flow control and power management on all ports
- VLAN support / 802.1Q tagging
- Port mirroring
- Port rights management
- Static MAC address list
- Static IPM address list
- Port static authentication
- IEEE 802.1X authentication
- Ingress filtering
- Storm prevention
- QoS on all ports
- Ingress / egress access lists
- Rate limiting
- QoS remarking
- Static trunking / LACP
- STP / RSTP
- IGMP/MLD snooping

### Security management

- Login/password, key or certificate authentication
- Secure switch management by HTTPS, SSH or SNMPv3
- 802.1X port-based authentication

### QoS

- Layer 2 802.1p User Priority tagging
- Layer 3 IP DSCP (Diffsev)
- Access Control Lists (L2, L3, L4)

### Multicast

- IGMP snooping (v1, v2, v3)
- MLD snooping (v1, v2)

### Layer3

- ICMP
- Proxy-ARP
- DHCP-relay
- NAT
- IPv4 routing (unicast/multicast)

- Static IP routing (unicast and multicast)
- RIPv1, RIPv2 (IPv4)
- RIPng(IPv6)
- OSPFv2 (IPv4) / OSPFv3(IPv6)

### Others

- PBIT results
- Temperature information
- CPU load
- Switch state
- Global and detailed ports statistics
- VLANs statistics
- Bridge egress, ingress and RMON statistics
- Ingress and egress access lists statistics
- Rate limiting statistics
- Queues and ingress buffers counters
- IGMP snooping state by VLAN and by port
- MAC address table access
- IPM address table access
- STP/RTSP state

### Switch Management

**Switchware** is a comprehensive switch management stack running on Interface Concept's Ethernet switch product line. It is running on the **ComEth4070e** on-board processor and supports a rich set of Layer 2/3 features controlled through the following interfaces:

- Graphical User Interface (GUI)
- Command Line Interface (CLI)
- SNMP (v2c or v3)

The **ComEth4070e** also supports VPX System Management in compliance with VITA 46.11 and based on the Intelligent Platform Management Interface (IPMI v1.5) for sensor management (temperature, voltage, current), inventory management, system configuration, recovery and diagnostic management.

Please consult the **Switchware** User's Manual for a comprehensive overview of all the product features.

### Grades

Criterion	Coating	Operation Temperature	Rec. Airflow	Oper. HR% no cond.	Storage Temperature	Sinusoidal Vibration	Random Vibration	Shock 1/2 Sin. 11ms
Standard	Optional	0 to 55°C	1 .. 2 m/s	5 to 90%	-45 to 85°C	2G [20..2000]Hz	0.002g2 /Hz [10..2000]Hz	20G
Extended	Yes	-20 to 65°C	2 .. 3 m/s	5 to 95%	-45 to 85°C	2G [20..2000]Hz	0.002g2 /Hz [10..2000]Hz	20G
Rugged	Yes	-40 to 75°C or 85°C(*)	2 .. 5 m/s	5 to 95%	-45 to 100°C	5G [20..2000]Hz	0.05g2 /Hz [10..2000]Hz	40G
Conduction Cooled 71°C	Yes	-40 to 71°C at the thermal interface(*)		5 to 95%	-45 to 100°C	5G [20..2000]Hz	0.1g2 /Hz [10..2000]Hz	40G
Conduction Cooled 85°C	Yes	-40 to 85°C at the thermal interface(*)		5 to 95%	-45 to 100°C	5G [20..2000]Hz	0.1g2 /Hz [10..2000]Hz	40G

(\*) : Temperature grades are subject to availability according to IC products. Please consult us.

For more information, please contact:



3, rue Félix Le Dantec  
 29000 QUIMPER  
 Tel. +33 (0)2 98 57 30 30  
 Fax. +33 (0)2 98 57 30 00  
 info@interfaceconcept.com

All information contained herein is subject to change without notice.