

PC Industriali

Serie GO-481 SAS - Chassis per Motherboard




PC Industriale 4U

Fino a 14 dischi SAS rimovibili


Configurato su richiesta

Burn in climatico su ogni apparato


Test Report di collaudo

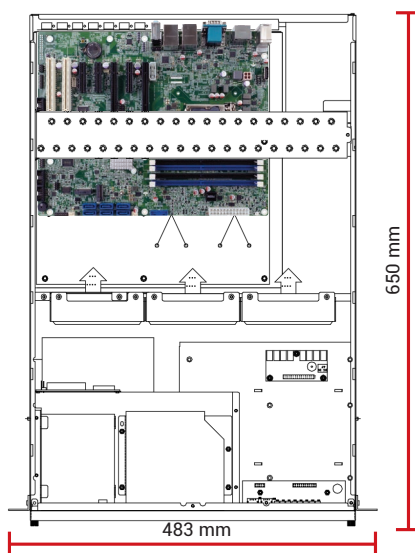

Fronte



Retro

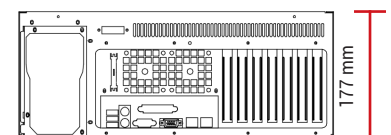

Chassis


IP-347- Rev.11

Dimensioni	Chassis 4U - 483 x 177 x 650 mm
Montaggio	Rack 19"
Materiale	Acciaio pre-zincato
Architettura	Motherboard ATX max 12" x 13"
Varianti	GO-481-SAS: Chassis colore nero
Drives	<ul style="list-style-type: none"> • 3x backplane x 4 dischi SAS, 1 connettore SFF-8643 • 12x Swappable Tray SAS 12 Gbps • 2x Swappable Tray SAS 6 Gbps
Ventilazione	3 x ventole (120 mm = 90.0CFM cad.) & opzionale 2 x ventole (60 mm =23.5CFM cad.)
Led sul fronte	LED per Power, funzionalità HDD, ventole, temperatura e LAN
Pulsanti	Power ON/OFF, System Reset , Buzzer reset
Fronte	Porta drive rimovibile con viti imperdibili, 2x USB
Retro	Allargiamento per 7 bracket full size
Colore	Nero o altri colori su richiesta
Shock	15G durata 11ms - EN 60068-2-27
Vibrazioni	10-150Hz: 1G - EN 60068-2-6
Umidità	5 - 95% non condensata
Temperatura	Operativa 0°C... +50°C Storage -20°C... +70°C

Complementi

Storage	<ul style="list-style-type: none"> • Dischi interni HDD / SSD / M.2 • Cassetti estraibili singoli o multipli per HDD / SSD / U.2 • Soluzioni SATA / SAS / NVMe
Media	<ul style="list-style-type: none"> • Masterizzatore DVD • Lettore interno CFLASH, Memory Stick, SD Card, SDHC etc. • Tastiera beige/nera italiana/inglese • Mouse ottico
Controller RAID	SATA / SAS / NVMe
Schede I/O	<ul style="list-style-type: none"> • Ethernet Server Adapter • GPGPU / Schede Video • Schede Multi-Head • Schede I/O Analogiche e Digitali • Schede FPGA • Schede MULTISERIALI • Frame Grabber • MIL-1553 / ARINC 429 / ARINC 418
Guide	Guide telescopiche per montaggio a rack
Sistemi Operativi	<ul style="list-style-type: none"> • Windows® versioni Enterprise / Embedded • Windows® versioni Server • Linux

Motherboard



	IMB-M47	IMBA-ADL-H610	IMBA-Q471	IMBA-Q470	IMB-M45	IMBA-Q370	IMB-M45H
CPU Preferred	<ul style="list-style-type: none"> i9-14900: 24C, 2.00GHz, 65-219W i7-14700: 20C, 2.10GHz, 65-219W i5-14500: 14C, 2.60GHz, 65-154W i3-14100: 4C, 3.50GHz, 60-110W i7-13700E: 16C, 1.90GHz, 65W i5-13500E: 14C, 4.40GHz, 65W i3-13100E: 4C, 3.30GHz, 60W i7-12700E: 12C, 1.60GHz, 65W i5-12500E: 6C, 2.90GHz, 65W i3-12100E: 4C, 3.20GHz, 60W 		<ul style="list-style-type: none"> i7-11700: 8C, 2.5GHz, 65W i5-11500: 6C, 2.7GHz, 65W i7-10700E: 8C, 2.9GHz, 65W i5-10500E: 6C, 3.1GHz, 65W i3-10100E: 4C, 3.2GHz, 65W 				<ul style="list-style-type: none"> i7-9700E: 8C, 2.6GHz, 65W i5-9500E: 6C, 3.0GHz, 65W i3-9100E: 4C, 3.1GHz, 65W i7-8700: 6C, 3.2GHz, 65W i5-8500: 6C, 3GHz, 65W i3-8100: 4C, 3.6GHz, 65W
Chipset	Intel Q670	Intel H610/H610E	Intel Q470/Q470E	Intel Q470E	Intel C246	Intel Q370	Intel H310
RAM	DDR5-4400 MHz 4x DIMM max 128GB	DDR4-3200 MHz 2x DIMM max 64GB	DDR4-2933 MHz 4x DIMM max 128GB	DDR4-2933 MHz 4x DIMM max 128GB	DDR4-2666 / 2400 MHz 4x DIMM max 128GB	DDR4-2666 / 2400 MHz max 64GB	DDR4-2666 / 2400 MHz 2x DIMM max 64GB
Graphics	VGA, DP, HDMI	DP, HDMI, iDPM	VGA, DP, HDMI, DP	VGA, DP, HDMI Internal Type-C DP	VGA, DP, HDMI	VGA, DP++, HDMI	VGA, HDMI
Ethernet	3x 2.5 x GbE	1x 2.5 x GbE; 1x GbE	3x 2.5 x GbE	2x 2.5 x GbE	2x GbE	2x GbE	2x GbE
SATA ports	8x SATA3 (support RAID 0,1,5,10)	4x SATA3 (support RAID 0,1,5,10)	5x SATA3 (support RAID 0,1,5,10)	4x SATA3 (support RAID 0,1,5,10)	6 x SATA3 (support RAID 0,1,5,10)	6 x SATA3 (support RAID 0,1,5,10)	4 x SATA3
M.2 slots	1x M.2 M-Key, up to 25110, PCIe 1x M.2 E-Key, 2230, PCIe, USB 2.0 and CNVI 1x M.2 B-Key, 3042/3052, PCIe, USB3.2 Gen1, USB 2.0 and SIM	--	1x M.2 M-key 2242 / 2280, PCIe, SATA	1x M.2 A key 2230 PCI-E x1 / USB 2.0 1x M.2 M key 2242 / 2280 PCI-E x4	--	1x M.2 A key 2230 PCI-E x1 / USB 2.0 1x M.2 M key 2280 PCI-E x2	--
USB	5x USB 3.2 Gen2 1x USB 3.2 Gen2x2 (Type C) 2x USB 3.1 via header 2x USB 2.0 via header 2x vertical USB 2.0 connectors	2x USB 3.2 Gen 1 2x USB 3.2 Gen 2 4x USB 2.0 2x USB 2.0 via header	2 x USB 3.2 Gen 2 2 x USB 3.2 Gen 1 2 x USB 3.2 Gen1 via header 2 x USB 2.0 6 x USB 2.0 via header	2x USB 3.2 Gen2 2x USB 3.2 Gen1 2 x USB 3.1 Gen 1 via header 2x USB 3.0 6x USB 2.0 via header	4x USB 3.1 Gen2 connectors (rear) 2x USB 3.1 Gen1 via header 1x USB 3.1 Gen1 (vertical type A connector) 6x USB 2.0 via header 1x USB 2.0 (vertical type A connector)	2 x USB 3.1 Gen 2 2 x USB 3.1 Gen 1 2 x USB 2.0	4 x USB 3.0 2 x USB 2.0
COM	2x RS-232/422/485 4x RS-232	2 x RS-232/422/485 4 x RS-232	1 x RS-422/485 2 x RS-232	1 x RS-232/422/485 2 x RS-232	2 x RS-232/422/485 4 x RS-232	1 x RS-232 2 x RS-232/422/485 via header and 3 x RS232	2x RS-232/455/485 4x RS-232
Other	Audio, LPT, PS2; 8x GPI, 8x GPO	Audio, Digital IO	Audio, Digital IO	Digital IO	Audio, PS2 combo, LPT, DIO	Audio, PS2, DIO	Audio, LPT, PS2 Combo, DIO
TPM	TPM 2.0	TPM 2.0	TPM 2.0	TPM 2.0	--	TPM 2.0 (via header) optional TPM-IN02-R20	--
Expansion slots	1x PCI-E x16 1x PCI-E x8 2x PCI-E x4 3x PCI-E x1	1* PCI-E x16 1* PCI-E x4 2* PCI-E x1 2* PCI	2+ PCI-E x16 3* PCI-E x4 open-end 2* PCI-E x1	1* PCI-E x16 3* PCI-E x4 open-end 3* PCI	1* PCI-E x16 Or 2* PCI-E x8 + 3* PCI-E x4 2* PCI	3*PCI-E x8 3*PCI-E x4 2*PCI	1* PCI-E x16 1* PCI-E x4 5* PCI
I/O shield	VGA, HDMI, DP 3x 2.5GbE 2x RS-232/422/485, Audio 5x USB 3.2, 1x USB 3.2	HDMI, DP 1x GbE, 1x 2.5 GbE 2x RS-232/422/485 6x USB 3.2, 4x USB 2.0	VGA, HDMI, DP 3x 2.5GbE 1x RS-232, Audio 4x USB 3.2, 2x USB 2.0	VGA, HDMI, DP 2x 2.5GbE 1x RS-232/422/485, 2x RS-232, Audio, PS2 4x USB 3.2, 2x USB 2.0	VGA, HDMI, DP 2x GbE 2x RS-232/422/485, Audio 4x USB 3.1	VGA, HDMI, DP++ 2x GbE 1x RS-232, Audio 6x USB, PS2	VGA, HDMI 2x GbE 2x RS-232/455/485 4x USB 3.0, 2x USB 2.0 Audio PS2 Combo

Alimentatori

AC



EN 62368

Z-MRPS2-500-2AC
PS2 Redundant 500W

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
20A	20A	40A	0.3A	0.5A	3A
Input 90V~264VAC					
MTBF >100.000 h					
Dimensioni 150x84x190 mm					

DC



Z-BMRW-5360V4V
PS2 Redundant 360W 24VDC

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	28A	-	0.8A	3.5A
Input 18VDC...36VDC					
MTBF 125.331 h					
Dimensioni 150x86x185 mm					

DC



Z-DMRW-5600V4V
PS2 Redundant 600W -48VDC

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	45A	-	0.8A	3.5A
Input -36VDC...-72VDC					
MTBF 120.000 h					
Dimensioni 150x86x185 mm					